

Stationary Compactors



S200 2yd "Shorty" Compactor



S300 3yd Compactor w/ Pin Off



S200 2yd Compactor w/ Load Hopper




S200 2yd "Shorty" w/
Side Load Hopper



S200 2yd w/ Walk on Deck/Hopper

General Product Specifications

Specifications	S-200 (2 YD)	S-300 (3 YD)	S-400 (4 YD)	S-500 (5 YD)
Basic Size	1.58 Cubic Yards (NSw MA Equivalent)	2.31 Cubic Yards (NSw MA Equivalent)	2.71 Cubic Yards (NSw MA Equivalent)	4.22 Cubic Yards (NSw MA Equivalent)
Overall Dimensions	120" L X 48" H x 66" W	168" L X 48" H x 66" W	168" L X 54" H x 66" W	239" L x 54" H x 66" W
Clear Top Opening	46" L X 60" W	61" L X 60" W	61" L X 60" W	94" L X 60" W
Discharge Openings	37" X 60"	37" X 60"	41" X 60"	41" X 60"
Ram Penetration	11"	14"	14"	16"
Normal Force	58,400 LBS @2050 PSI	48,400 LBS @1700 PSI	48,400 LBS @1700 PSI	65,000 LBS @1700 PSI
Maximum Force	71,000 LBS @2550 PSI	59,000 LBS @2100 PSI	59,000 LBS @2100 PSI	77,000 LBS @2100 PSI
Ram Facing	60" X 29"	60" X 29"	60" X 34"	60" X 34"
Cycle Time	60 Sec	60 Sec	60 Sec	100 Sec
Motor	15 HP	15 HP	15 HP	15 HP
Pump	12 GPM	15 GPM	15 GPM	15 GPM
Cylinder	6" Dia X 2.5" Rod X 56" Stroke	6" Dia X 4" Rod X 78" Stroke	6" Dia X 4" Rod X 78" Stroke	7" Dia X 4" Rod X 110" Stroke

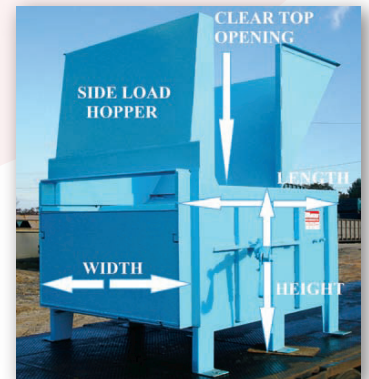

- * Heavy Duty Performance Specifications Available on All Sizes
- * UL Approved Panels and Power Units
- * Meets ANSI Z245.2 Regulations and OSHA Requirements



PAK-R
Disposal & Recycling

pak-r.com